

16MnCrS5

All

General Information

16MnCrS5 is a grade with improved machinability. It is recommended for applications with high demands on mechanical properties, machinability and surface quality. It is also suitable for case hardening and has good weldability.

M-Steel®

The basis for the concept is that non-metallic inclusions are modified and controlled with calcium treatment in a way to minimize tool wear and to maximize chip control in machining operations. Our M-Steel treatment can be applied to any steel grade.

Similar designations

18MnCr5-4 (EN10027), 16MnCr5, 1.7139, 1.7131, SB9218

Chemical composition

Variant	Cast	Weldability		C %	Si %	Mn %	P %	S %	Cr %	Cu %	Al %
SB16MnCrS5	CC	CEV 0.58 _{max}	Min	0.16	0.15	1.15	-	0.025	0.90	-	0.015
		Pcm 0.3 _{max}	Max	0.19	0.35	1.30	0.035	0.040	1.10	0.35	0.050

Mechanical Properties


Variant	<div><div></div>Condition</div>	Format	Dimension [mm]	Yield strength min [MPa]	Tensile strength [MPa]	Elongation A ₅ [%]	Hardness
SB16MnCrS5	+AR	Flat bar	< 100	350**	560-720	15	< 225 HB

*R_{p0.2} * R_{eh}, ** R_{el}*

Transformation temperatures

	Temperature °C
MS	418
AC1	738
AC3	822

Hardenability

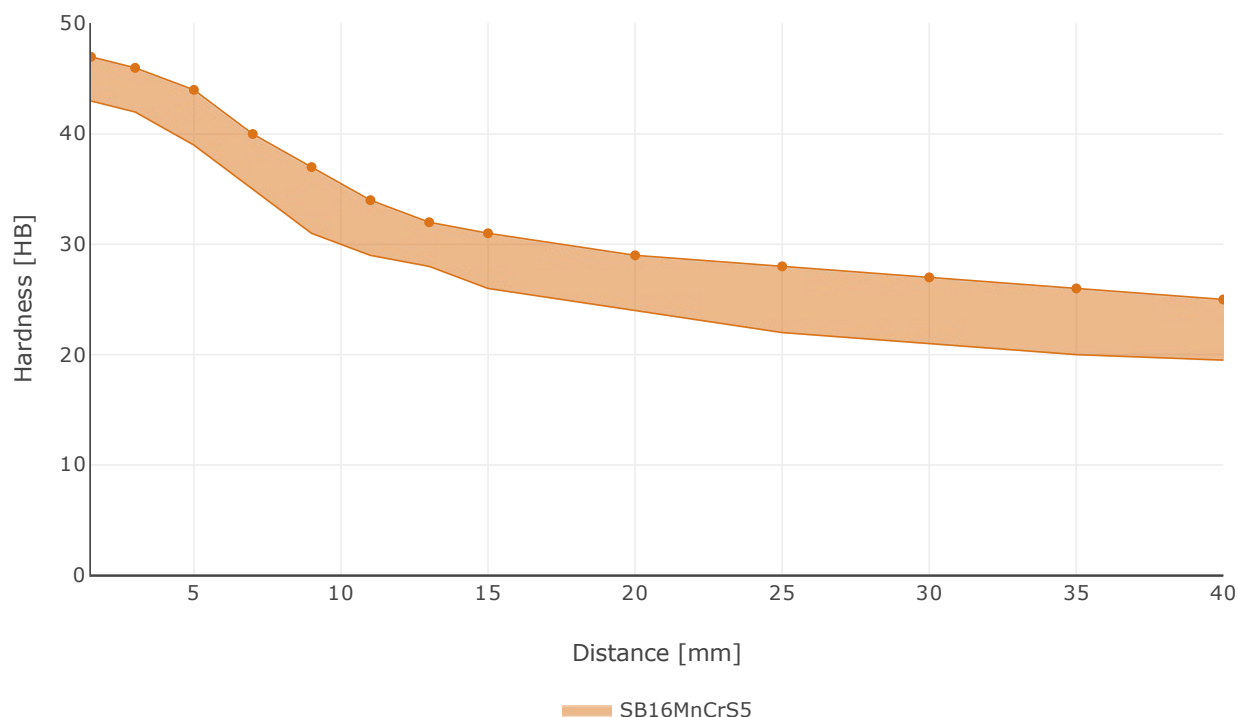

EN ISO 683-3 data for +H band

SUSTAINABILITY-ENVIRONMENTAL IMPACT DATA

At Ovako sustainability and reduction of our environmental impact is a major focus in everything we do.

Further information is found [here](#).

Steel works	Hofors	Smedjebacken	Imatra
CO2e/kg	120	62	76

To get the full picture of our products environmental impact we have to look at all of our CO₂ emission sources.

Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

Steel Grade	Format	Condition ⓘ	Scope 1-3 (CO2e kg /1000 kg steel)	Climate compensated Net emission = Scope 3 (CO2e kg /1000 kg steel) Scope 1 - 2 = 0 (compensated)
SB16MnCrS5(M)	Round bar	+AR	427	197

All above data are to be seen as typical values for the specified format and condition. Detailed information about your specific product please contact your sales contact.

Other properties (typical values)

Youngs module (GPa)	Poisson´s ratio (-)	Shear module (GPa)	Density (kg/m3)
210	0.3	80	7800
Average CTE 20-300°C (µm/m°K)	Specific heat capacity 50/100°C (J/kg °K)	Thermal conductivity Ambient temperature (W/m°K)	Electrical resistivity Ambient temperature (µΩm)
12	460 - 480	40 - 45	0.20 - 0.25

Contact us

Would you like to know more about our offers? Don´t hesitate to contact us:

Via e-mail: info@ovako.com

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

Disclaimer

The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.