

16NiCr6-4\* All

General Information

Ovako 147Q is a high cleanliness case hardening steel suitable for demanding powertrain applications. The grade is produced in Ovako's highest cleanliness level, isotropic quality (IQ), to ensure a minimum of oxidic and sulphidic inclusions.

*\* Designation followed by "\*" is not an official EN standard grade but named according to the rules in EN 10027.*

IQ-Steel®

IQ-Steel® is an isotropic quality ultra clean steel optimized for high fatigue strength under multi axial loading.

Similar designations

18NiCr5-5

Chemical composition

Variant	Cast	Weldability		C %	Si %	Mn %	P %	S %	Cr %	Ni %	Mo %	V %
147Q	IC	CEV 0.72 <sub>max</sub>	Min	0.13	0.10	0.60	-	-	0.90	1.20	-	-
		Pcm 0.35 <sub>max</sub>	Max	0.18	0.40	0.85	0.015	0.002	1.20	1.50	0.10	0.100

## Mechanical Properties

Variant	Condition ⓘ	Format	Dimension [mm]	Yield strength min [MPa]	Tensile strength [MPa]	Elongation A <sub>5</sub> [%]	Hardness
147Q	+A	Round bar	24 < 120	-	-	-	< 230 HB
	+QT	Round bar	30 < 63	540	740-1130	10	220-315 HB

$R_{p0.2}$  \*  $R_{eh}$  \*\*  $R_{el}$

## Transformation temperatures

	Temperature °C
MS	403
AC1	719
AC3	814


## Heat treatment recommendations

Treatment	Condition ⓘ	Temperature cycle	Cooling/quenching
Hot forging	+U	800-1200°C	In air
Normalizing	+N	860-890°C	In air
Soft annealing	+A	600-670°C / 2h	In air
Carburizing	+C	850-930°C Carbon potential see diagram	
Hardening	+QT	840-890°C	In oil
Hardening	+QT	780-830°C Hardening of as-carburized component	In oil


## Heat Treatment Guide generated Graphs

The following graphs are generated from a theoretical model. For further info see the Heat treatment guide module. Select a specific grade version for individual display.


Tempering Diagram (hardness)

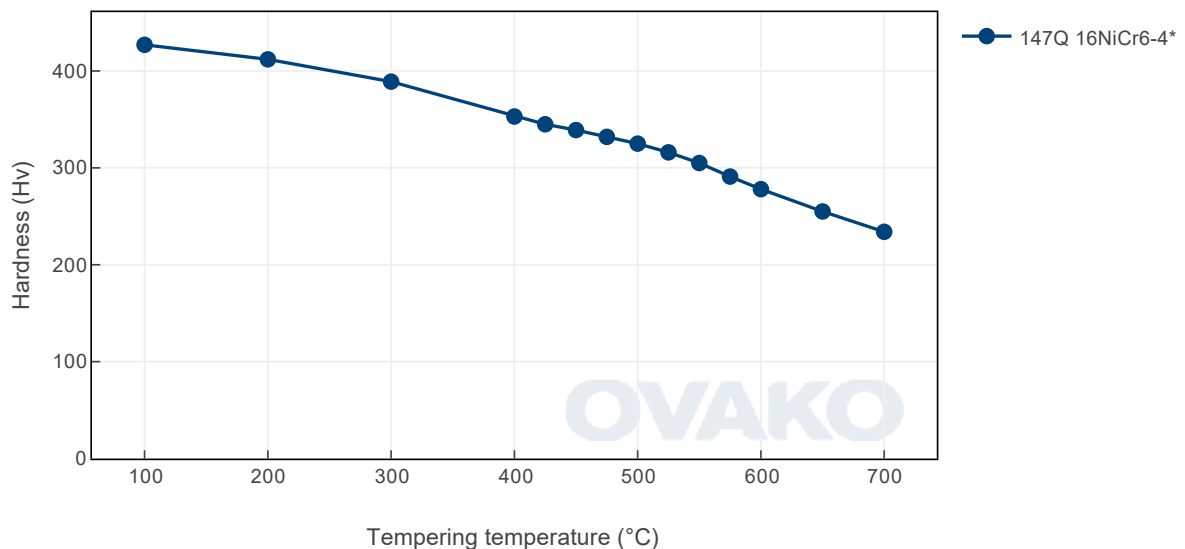

Tempering Diagram (strength)


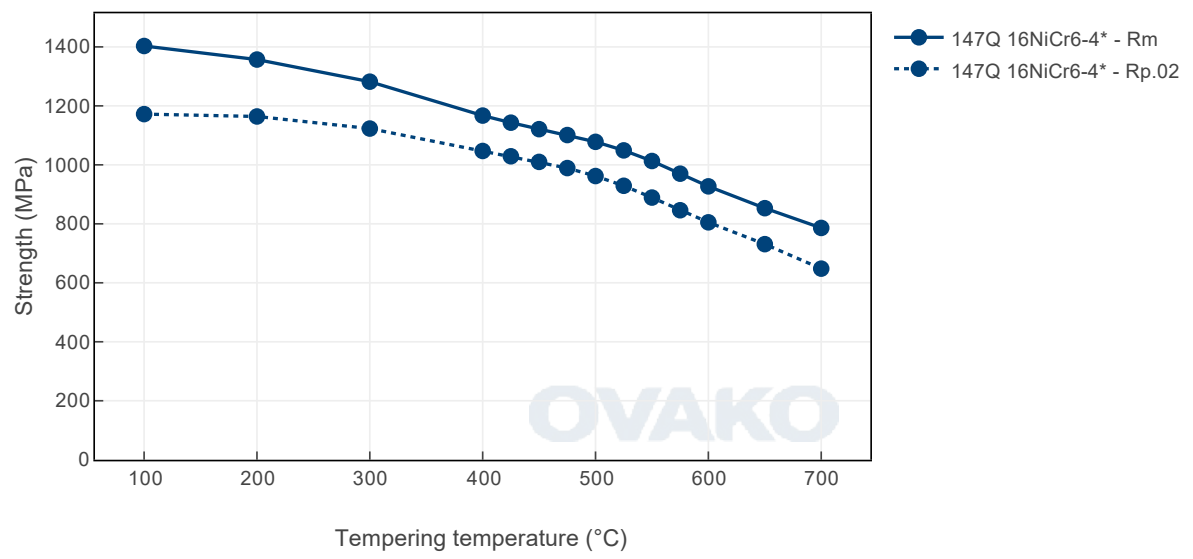


# Jominy

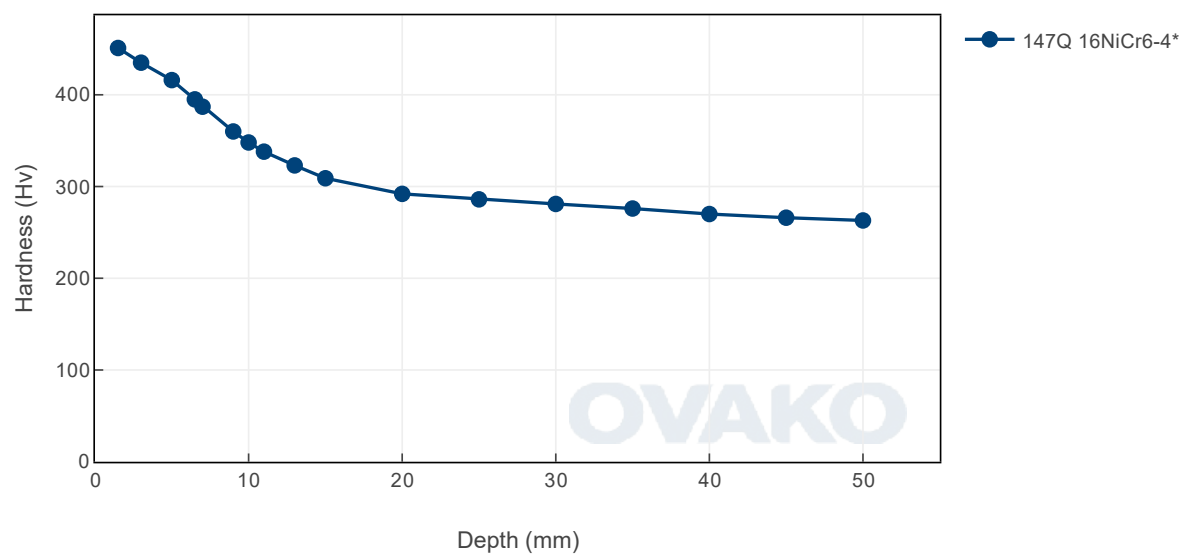



## Case carburizing response - Ovako 147Q

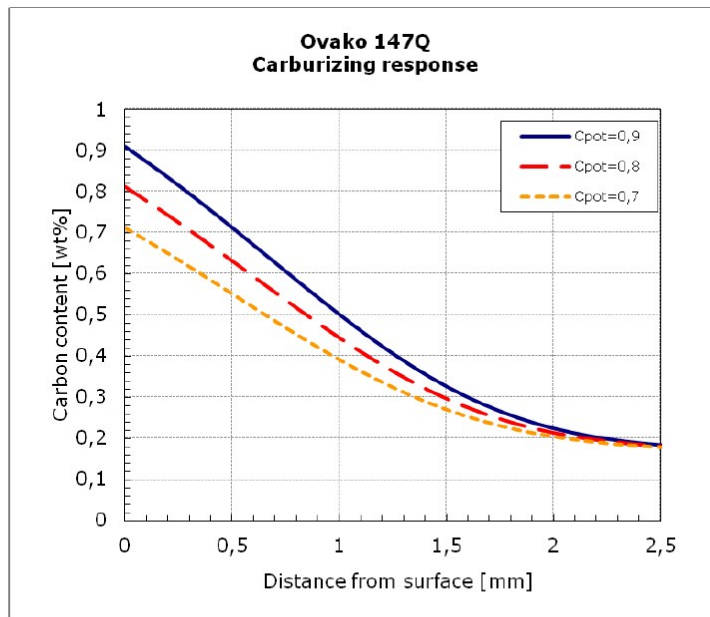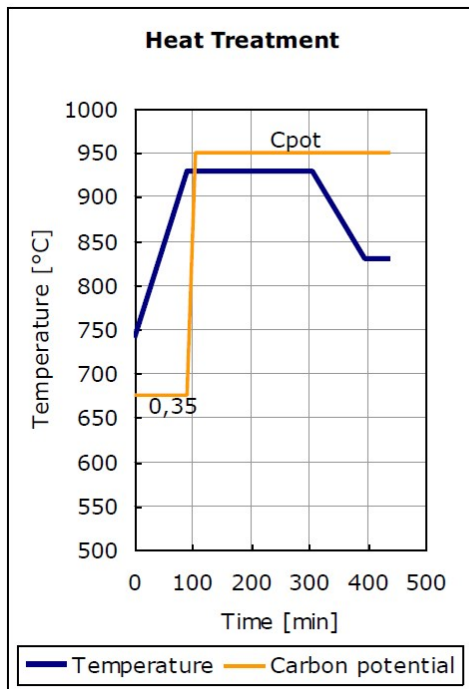


Carburization response for Ovako 147Q for the cycles shown

## Steel cleanliness - Ovako 147Q

Micro inclusions - IQ	
Applied standard	DIN 50602 K1
Sampling	Six random samples from the final product dimension
Limits	The limit is dimension dependent. The average rating of six samples should not exceed the limits given in graph.

Macro inclusions – IQ		
Applied standard	ISO 3763 (Blue fracture)	10MHz UST (Ovako internal procedure)
Sampling	Statistical testing on billets	
Limits	<1mm/dm <sup>2</sup>	< 10 defects/dm <sup>3</sup> >0,2mm FBH

Inclusion limits IQ-processed steel

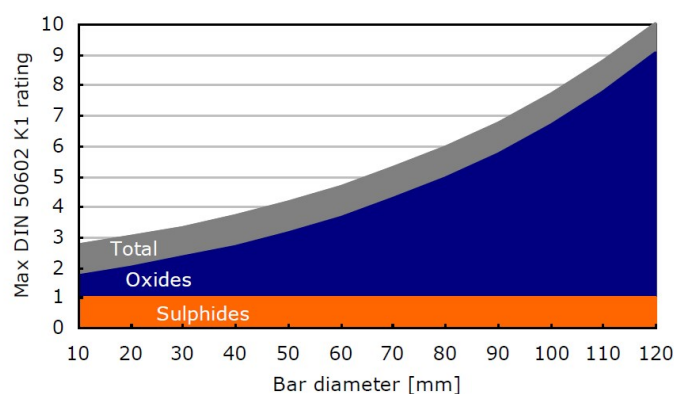

## SUSTAINABILITY-ENVIRONMENTAL IMPACT DATA

At Ovako sustainability and reduction of our environmental impact is a major focus in everything we do.

Further information is found [here](#).

Steel works	Hofors	Smedjebacken	Imatra
CO <sub>2</sub> e/kg	120	62	76

To get the full picture of our products environmental impact we have to look at all of our CO<sub>2</sub> emission sources.

Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and

heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

Steel Grade	Format	Condition	Scope 1-3 (CO <sub>2</sub> e kg /1000 kg steel)	Climate compensated Net emission = Scope 3 (CO <sub>2</sub> e kg /1000 kg steel) Scope 1 - 2 = 0 (compensated)
147Q	Round bar	+AR	826	427
147Q	Round bar	+FP	832	431
147Q	Tube,wall	+AR	867	470
147Q	Tube,wall	+FP	870	472

To get the full picture of our products environmental impact we have to look at all of our CO<sub>2</sub> emission sources.

Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

### Other properties (typical values)

Youngs module (GPa)	Poisson's ratio (-)	Shear module (GPa)	Density (kg/m <sup>3</sup> )
210	0.3	80	7800
Average CTE 20-300°C (µm/m°C)	Specific heat capacity 50/100°C (J/kg °K)	Thermal conductivity Ambient temperature (W/m°C)	Electrical resistivity Ambient temperature (µΩm)
12	460 - 480	40 - 45	0.20 - 0.25

### Contact us

Would you like to know more about our offers? Don't hesitate to contact us:

Via e-mail: [info@ovako.com](mailto:info@ovako.com)

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

### Disclaimer

*The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.*