

20MnCrNiMo4-2-2* All

General Information

20MnCrNiMo4-2-2* or 8720 as it is also named in US standards, is a case hardening steel used in forgings to eg rock drilling tools.

For additional Heat Treatment Data, please visit the Heat Treatment Guide.

** Designation followed by "*" is not an official EN standard grade but named according to the rules in EN 10027.*

Similar designations

AISI 8720

Chemical composition

Variant	Cast	Di		C %	Si %	Mn %	P %	S %	Cr %	Ni %	Mo %	Cu %
4524	CC		Min	0.20	0.20	0.78	0.000	0.000	0.57	0.58	0.21	0.00
			Max	0.22	0.30	0.90	0.020	0.015	0.65	0.65	0.25	0.25
4766	CC	3	Min	0.19	0.20	0.80	0.000	0.000	0.45	0.45	0.40	0.00
			Max	0.23	0.35	1.00	0.025	0.015	0.65	0.65	0.55	0.25
152E	IC		Min	0.20	0.20	0.80	0.000	0.000	0.50	0.50	0.20	0.00
			Max	0.22	0.30	0.90	0.020	0.010	0.65	0.65	0.30	0.25
8720H	Std		Min	0.17	0.15	0.60	-	-	0.35	0.35	0.20	-
			Max	0.23	0.35	0.95	-	-	0.65	0.75	0.30	-

Mechanical Properties

Variant	Condition	Format	Dimension [mm]	Hardness
4766	+AR	Round bar	25 < 160	< 250 HB

$R_{p0.2}$ * R_{eh} , ** R_{el}


Transformation temperatures

	Temperature °C
MS	397
AC1	725
AC3	828


Heat Treatment Guide generated Graphs

The following graphs are generated from a theoretical model. For further info see the Heat treatment guide module. Select a specific grade version for individual display.


Tempering Diagram (hardness)

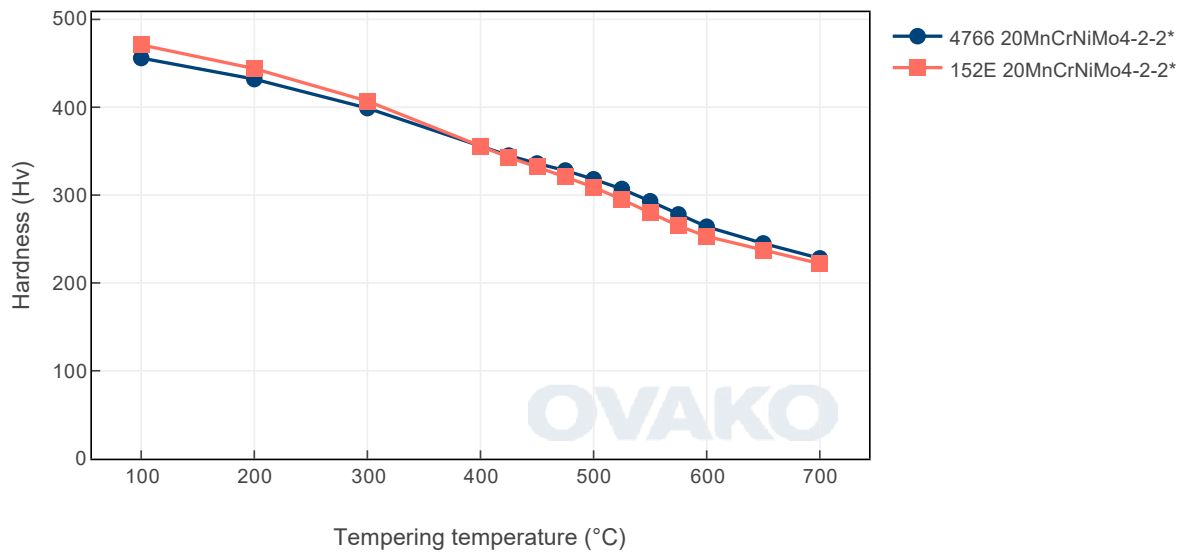


Tempering Diagram (strength)

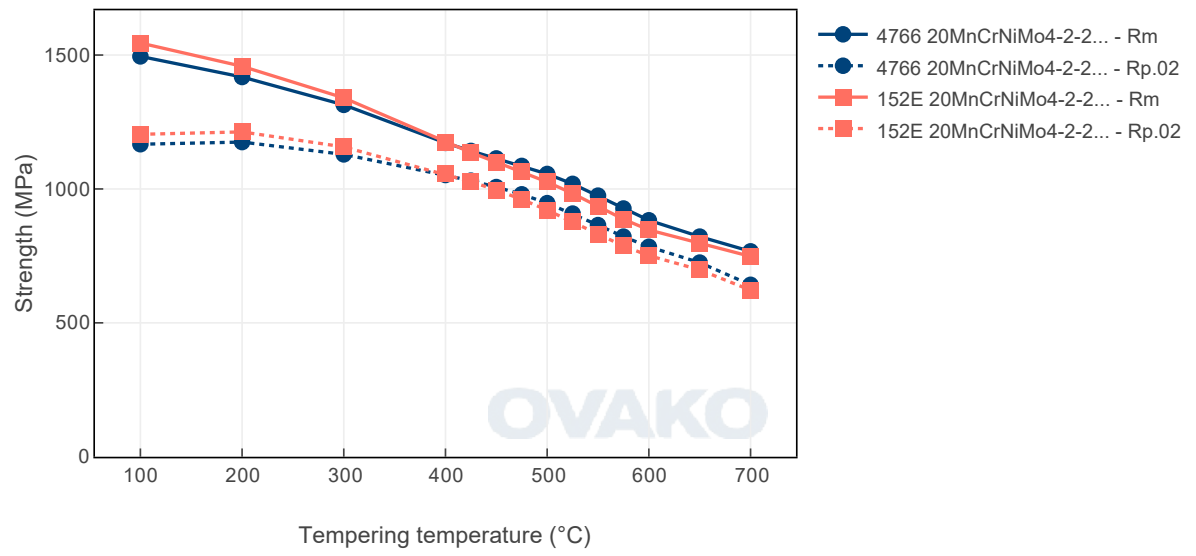

Jominy

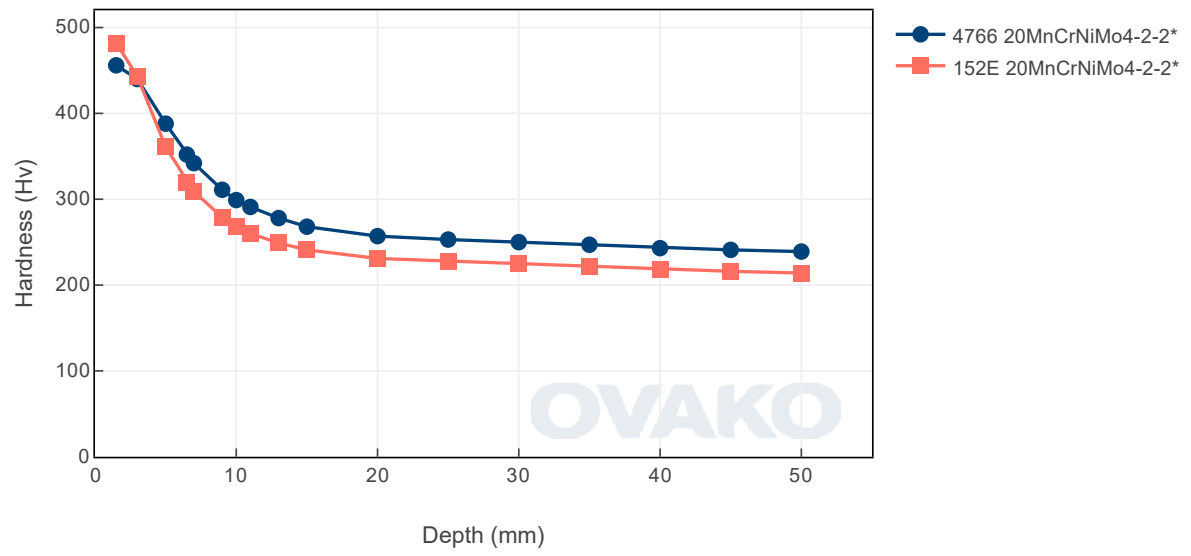

Hardenability

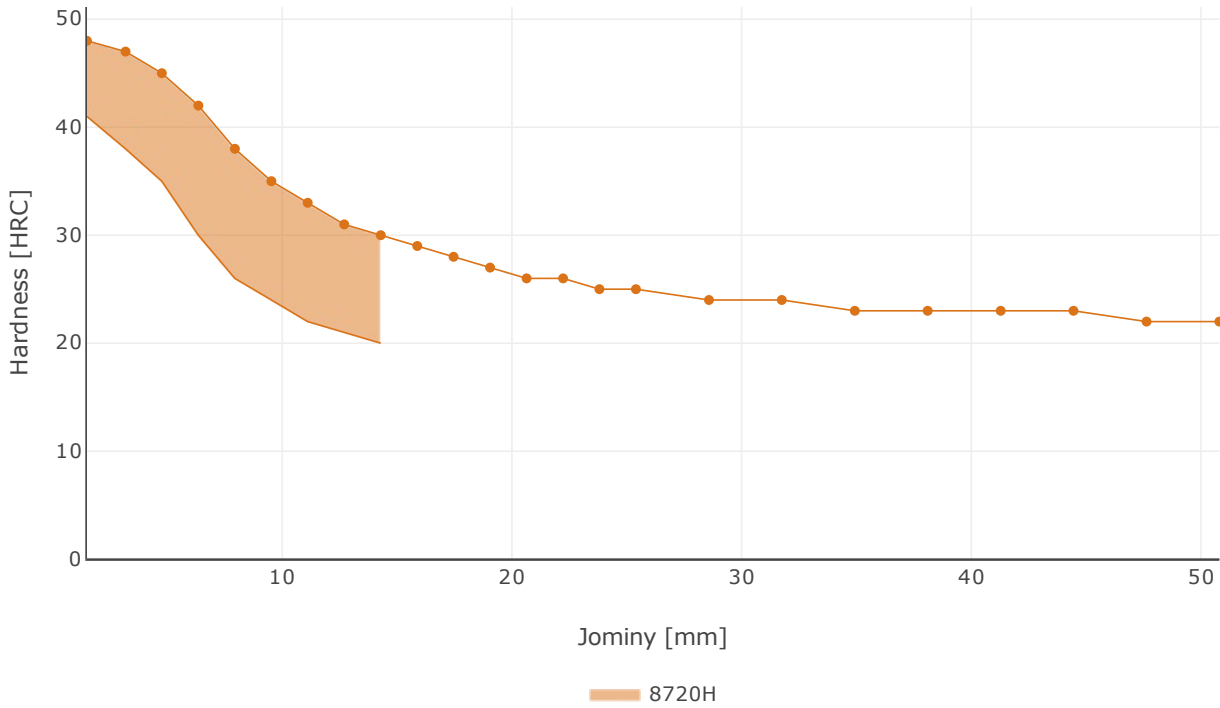

SUSTAINABILITY-ENVIRONMENTAL IMPACT DATA

At Ovako sustainability and reduction of our environmental impact is a major focus in everything we do.

Further information is found [here](#).

Steel works	Hofors	Smedjebacken	Imatra
CO2e/kg	120	62	76

To get the full picture of our products environmental impact we have to look at all of our CO₂ emission sources.

Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

Steel Grade	Format	Condition ⓘ	Scope 1-3 (CO2e kg /1000 kg steel)	Climate compensated Net emission = Scope 3 (CO2e kg /1000 kg steel) Scope 1 - 2 = 0 (compensated)
152E	Round bar	+AR	678	279
152E	Round bar	+FP	683	282
152E	Tube,wall	+AR	706	309
152E	Tube,wall	+FP	709	311
4766	Round bar	+AR	616	312
4524	Round bar	+AR	609	307

All above data are to be seen as typical values for the specified format and condition. Detailed information about your specific product please contact your sales contact.

[Other properties \(typical values\)](#)

Youngs module (GPa)	Poisson´s ratio (-)	Shear module (GPa)	Density (kg/m3)
210	0.3	80	7800
Average CTE 20-300°C (µm/m°K)	Specific heat capacity 50/100°C (J/kg °K)	Thermal conductivity Ambient temperature (W/m°K)	Electrical resistivity Ambient temperature (µΩm)
12	460 - 480	40 - 45	0.20 - 0.25

Contact us

Would you like to know more about our offers? Don´t hesitate to contact us:

Via e-mail: info@ovako.com

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

Disclaimer

The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.