

STEEL GRADE

Last revised: Tue, 28 Jan 2025 16:17:42 GMT

27MnCrB5-2 All

General Information

WR-Steel®

(Wear resistant) WR-steel, stands for wear-resistant steel. This group of steel includes a broad range of grades with a wide range of hardness levels 350 – 650 HV, dimensions and steel grades designed to give you a wear-resistant advantage when making product exposed to a high degree of wear and where service life is important. WR-steels are characterised by consistent properties and cost effectiveness due to optimized alloy content for different end applications.

For additional Heat Treatment Data, please visit the Heat Treatment Guide.

Similar designations

27MnCrB5-2, 28MnCrB5-2, 29MnCrB5-2, BCM 311

Chemical composition

Variant	Cast	Weldability		C %	Si %	Mn %	P %	S %	Cr %	B %
5465 (BCM311)	CC	CEV 0.58 _{max}	Min	0.24	-	1.10	-	-	0.30	0.0008
		Pcm 0.39 _{max}	Max	0.30	0.40	1.40	0.025	0.035	0.60	0.0050

Mechanical Properties

Variant	Condition ⁱ	Format	Dimension [mm]	Yield strength min [MPa]	Tensile strength [MPa]	Elongation A ₅ [%]	Reduction of area Z _{min} [%]	Hardness	Impact (ISO-V) strength _{min}
5465 (BCM311)	+AR	Round bar	< 90	-	-	-	-	< 250 HB	-
	+QW	Round bar	70 typical	850	1050-1300	10	45	33-41 HRC	20 °C 30 J (long)
	+QT	Round bar	70 typical	700	800-1000	14	55	22-31 HRC	20 °C 70 J (long)

*R_{p0.2} * R_{eh}, ** R_{el}*

BCM 311 +QT tempered at 500°C

Transformation temperatures

	Temperature °C
MS	382
AC1	720
AC3	786


Heat treatment recommendations

Treatment	Condition ⁱ	Temperature cycle	Cooling/quenching
Quench & Tempering	+QT	880 - 910 °C	in water or oil


Heat Treatment Guide generated Graphs

The following graphs are generated from a theoretical model. For further info see the Heat treatment guide module. Select a specific grade version for individual display.


Tempering Diagram (hardness)

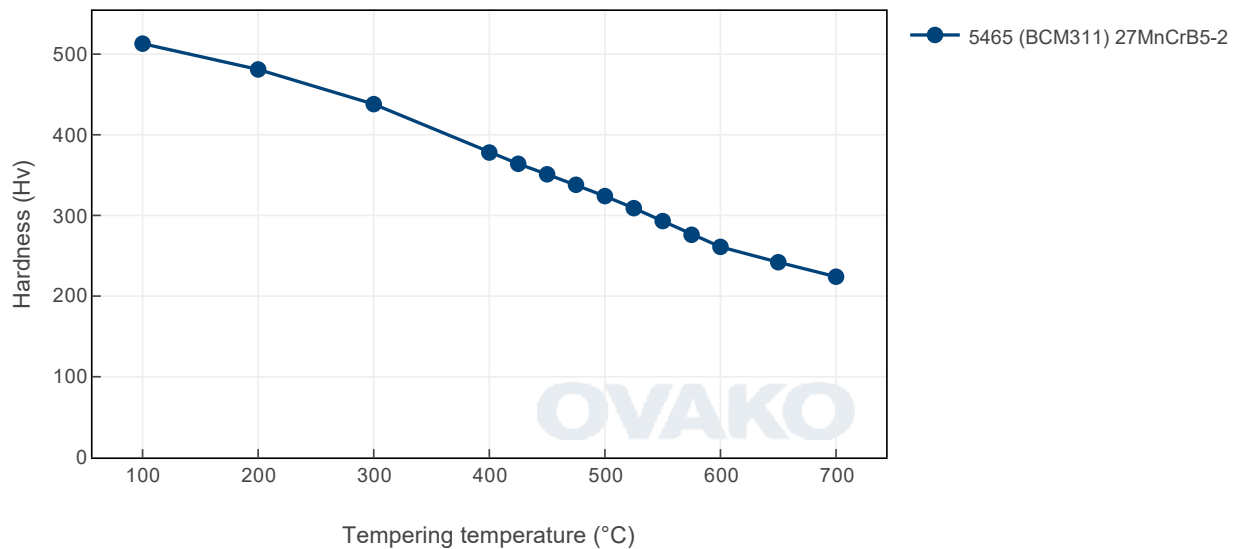

Tempering Diagram (strength)

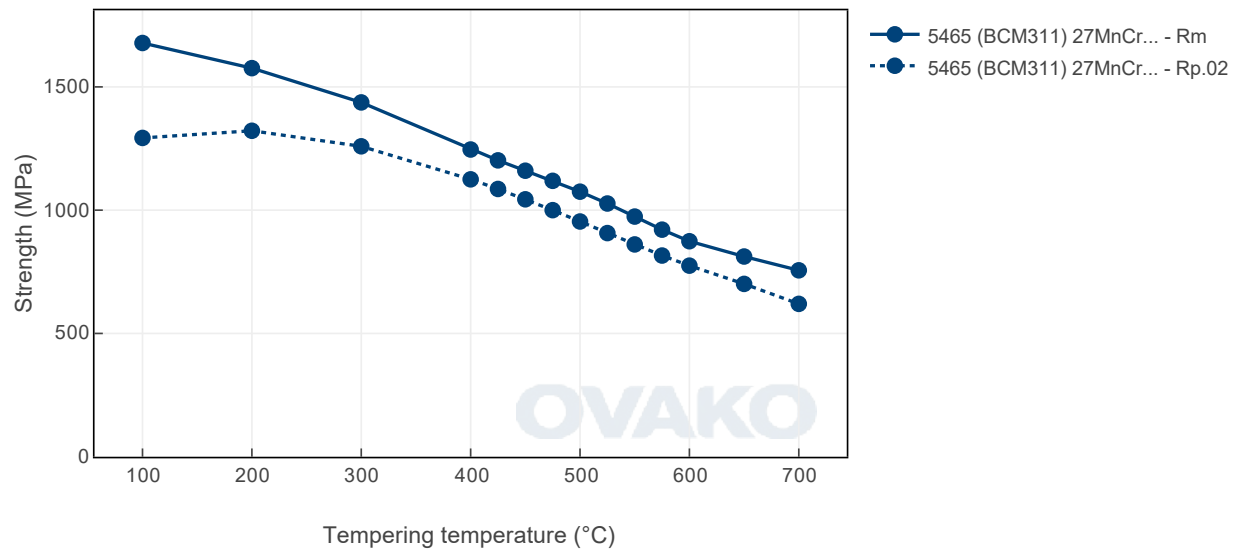

Jominy

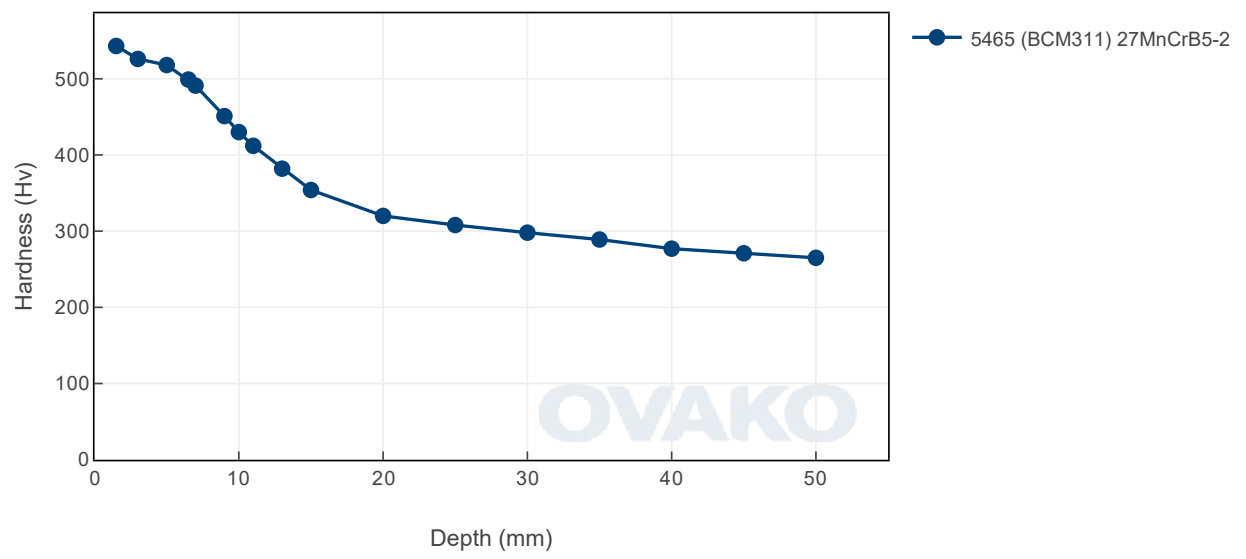

SUSTAINABILITY-ENVIRONMENTAL IMPACT DATA

At Ovako sustainability and reduction of our environmental impact is a major focus in everything we do.

Further information is found [here](#).

Steel works	Hofors	Smedjebacken	Imatra
CO2e/kg	120	62	76

To get the full picture of our products environmental impact we have to look at all of our CO₂ emission sources.

Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

Steel Grade	Format	Condition ¹	Scope 1-3 (CO2e kg /1000 kg steel)
SB27M12CB (SB9660)	Flat bar	+AR	513
SB29M13CB (SB9667)	Flat bar	+AR	408
SB28M12CB (SB9652)	Flat bar	+AR	410
5465 (BCM311)	Round bar	+AR	494

All above data are to be seen as typical values for the specified format and condition. Detailed information about your specific product please contact your sales contact.

Other properties (typical values)

Youngs module (GPa)	Poisson 's ratio (-)	Shear module (GPa)	Density (kg/m3)
210	0.3	80	7800
Average CTE 20-300°C (µm/m°K)	Specific heat capacity 50/100°C (J/kg °K)	Thermal conductivity Ambient temperature (W/m°K)	Electrical resistivity Ambient temperature (µΩm)
12	460 - 480	40 - 45	0.20 - 0.25

Contact us

Would you like to know more about our offers? Don't hesitate to contact us:

Via e-mail: info@ovako.com

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

Disclaimer

The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.