

## STEEL GRADE

Last revised: Tue, 28 Jan 2025 16:19:44 GMT

# 28MnB5\*

All

## General Information

Grade SB27M12Bm is boron steel used in quenched and tempered condition. The material is suitable for moderately or highly stressed parts such as wear parts on agricultural, forestry and excavators. The grade has tighter chemical analysis than grade SB27M12CB and is recommended for thickness  $\leq 15$  mm. Its closest equivalent is 28MnB5 (1.0871).

## Similar designations

SB27M12Bm - 26MnB5-3, 1.0871


## Chemical composition

Variant	Cast	Weldability		C %	Si %	Mn %	P %	S %	Cr %	Al %	B %
SB27M12Bm	CC	CEV 0.53 <sub>max</sub>	Min	0.25	0.15	1.10	-	-	0.15	0.010	0.0010
		Pcm 0.38 <sub>max</sub>	Max	0.30	0.35	1.30	0.025	0.015	0.25	0.040	0.0050

## Transformation temperatures

	Temperature °C
MS	379
AC1	720
AC3	784

## Hardenability

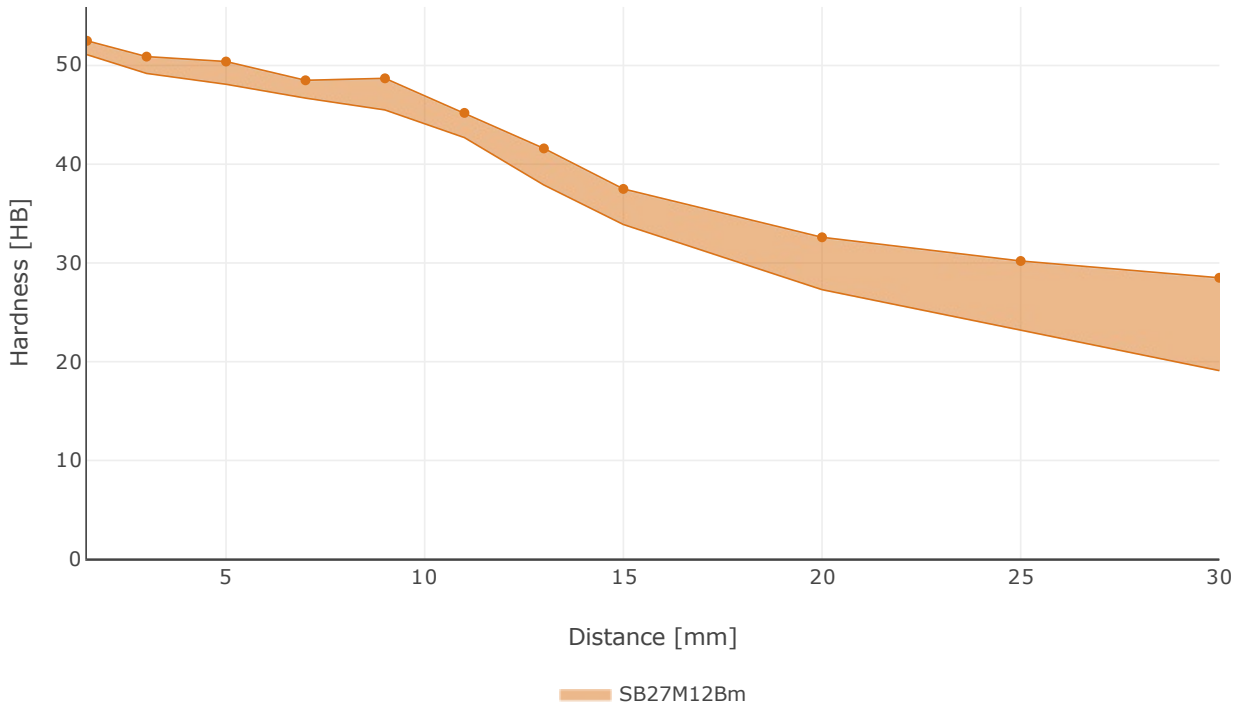

## SUSTAINABILITY-ENVIRONMENTAL IMPACT DATA

At Ovako sustainability and reduction of our environmental impact is a major focus in everything we do.

Further information is found [here](#).

Steel works	Hofors	Smedjebacken	Imatra
CO <sub>2</sub> e/kg	120	62	76

To get the full picture of our products environmental impact we have to look at all of our CO<sub>2</sub> emission sources.

Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

Steel Grade	Format	Condition	Scope 1-3 (CO <sub>2</sub> e kg /1000 kg steel)
28MnB5	Flat bar	+AR	409
SB27M12Bm	Flat bar	+AR	398

All above data are to be seen as typical values for the specified format and condition. Detailed information about your specific product please contact your sales contact.

## Other properties (typical values)

Youngs module (GPa)	Poisson's ratio (-)	Shear module (GPa)	Density (kg/m <sup>3</sup> )
210	0.3	80	7800
Average CTE 20-300°C (µm/m°K)	Specific heat capacity 50/100°C (J/kg °K)	Thermal conductivity Ambient temperature (W/m°K)	Electrical resistivity Ambient temperature (µΩm)
12	460 - 480	40 - 45	0.20 - 0.25

## Contact us

Would you like to know more about our offers? Don't hesitate to contact us:

Via e-mail: [info@ovako.com](mailto:info@ovako.com)

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

**Disclaimer**

*The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.*