

## 41Cr4 All

### General Information

41Cr4 is a steel for quenching and tempering recommended for components with strength requirements lower than the steel 42CrMo4. It is suitable for induction surface hardening, min hardness 52 HRC. It through hardens in oil up to appr. 40 mm diameter.

For additional Heat Treatment Data, please visit the Heat Treatment Guide

### Similar designations

41CrS4, SS2245, 530M40, 530H40, EN18, SCR440, 42C4, 1.7035, 1.7039

### Chemical composition

Variant	Cast	Di		C %	Si %	Mn %	P %	S %	Cr %
5515	CC	4.4	Min	0.38	-	0.60	-	0.020	0.90
			Max	0.45	0.40	0.90	0.025	0.035	1.20

## Mechanical Properties

Variant	Condition	Format	Dimension [mm]	Yield strength min [MPa]	Tensile strength [MPa]	Elongation A <sub>5</sub> [%]	Reduction of area Z <sub>min</sub> [%]	Hardness	Impact (ISO-V) strength <sub>min</sub>
5515	+A	Round bar	20 < 160	-	-	-	-	< 241 HB	-
	+QT	Round bar	20 < 40	660*	900-1100	12	35	-	20 °C 35 J (long)
		Round bar	40.1 < 100	560*	800-950	14	40	-	20 °C 35 J (long)

*RP<sub>0.2</sub> \* R<sub>eh</sub>, \*\* R<sub>el</sub>*

## Transformation temperatures

	Temperature °C
MS	320
AC1	735
AC3	790


## Heat treatment recommendations

Treatment	Condition	Temperature cycle	Cooling/quenching
Soft annealing	+A	670- 710°C	In air
Quench & Tempering	+QT	Austenizing 830 - 860°C Tempering 540 - 680°C	Water or oil


## Heat Treatment Guide generated Graphs

The following graphs are generated from a theoretical model. For further info see the Heat treatment guide module. Select a specific grade version for individual display.


Tempering Diagram (hardness)

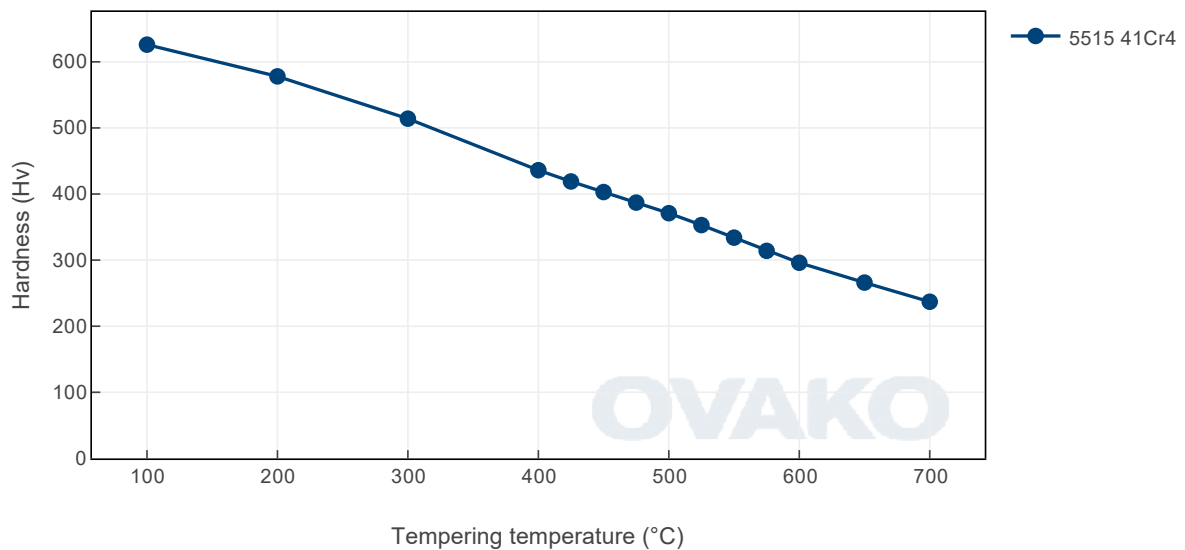


Tempering Diagram (strength)

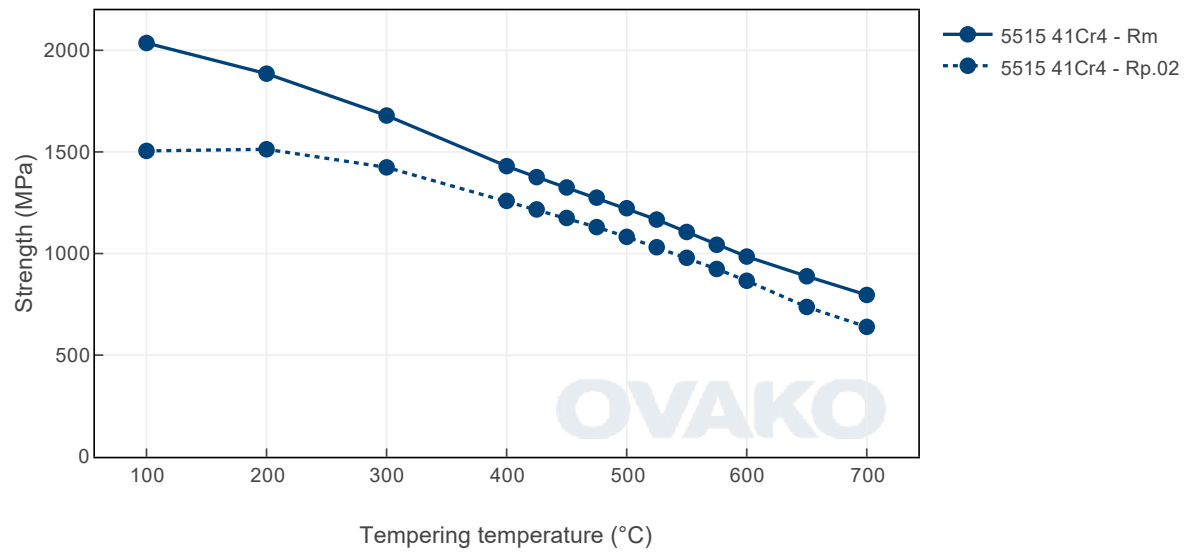

# Jominy

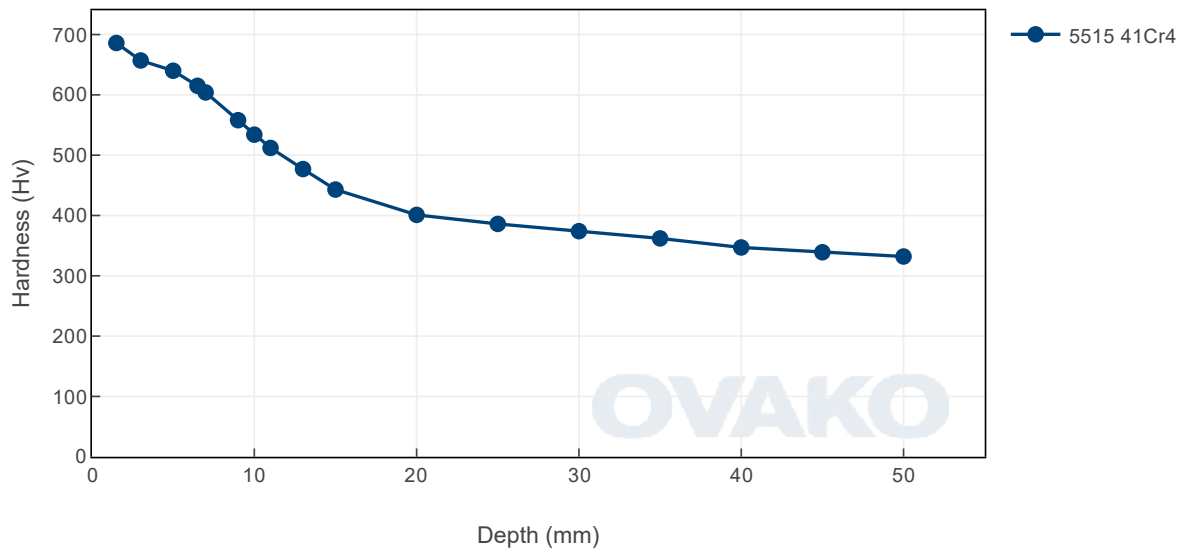



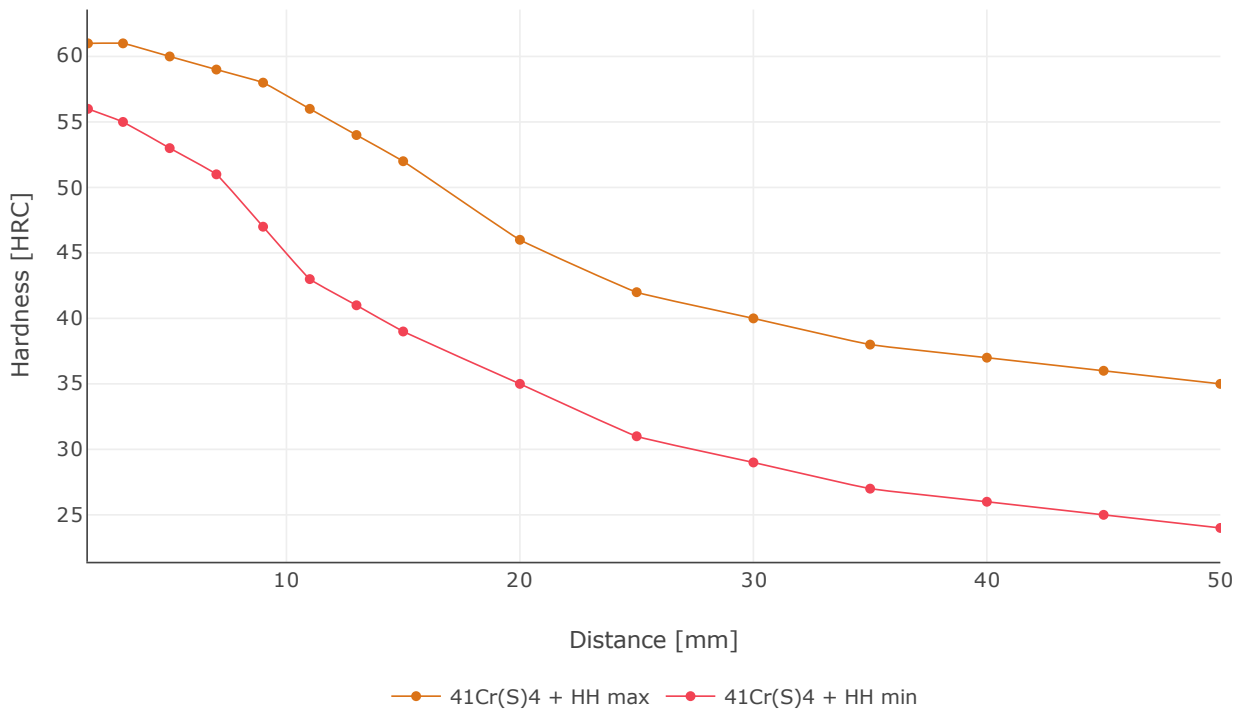

## SUSTAINABILITY-ENVIRONMENTAL IMPACT DATA

At Ovako sustainability and reduction of our environmental impact is a major focus in everything we do.

Further information is found [here](#).

Steel works	Hofors	Smedjebacken	Imatra
CO2e/kg	120	62	76

To get the full picture of our products environmental impact we have to look at all of our CO<sub>2</sub> emission sources.

Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

Steel Grade	Format	Condition	Scope 1-3 (CO2e kg /1000 kg steel)	Climate compensated Net emission = Scope 3 (CO2e kg /1000 kg steel) Scope 1 - 2 = 0 (compensated)
5515	Round bar	+AR	510	229
5515	Round bar	+QT	761	274

All above data are to be seen as typical values for the specified format and condition. Detailed information about your specific product please contact your sales contact.

## Other properties (typical values)

Youngs module (GPa)	Poisson´s ratio (-)	Shear module (GPa)	Density (kg/m3)
210	0.3	80	7800
Average CTE 20-300°C (µm/m°K)	Specific heat capacity 50/100°C (J/kg °K)	Thermal conductivity Ambient temperature (W/m°K)	Electrical resistivity Ambient temperature (µΩm)
12	460 - 480	40 - 45	0.20 - 0.25

## Contact us

Would you like to know more about our offers? Don't hesitate to contact us:

Via e-mail: [info@ovako.com](mailto:info@ovako.com)

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

**Disclaimer**

*The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.*