

MATERIAL DATA SHEET

STEEL GRADE

Last revised: Fri, 31 Jan 2025 15:11:32 GMT

OVAKO

C55 All

General Information

C55 is a carbon steel for general purposes found in three variants in EN ISO 683-1.

510A is an ingot casted steel. High hardness (approx. 60HRC) and high strength can be achieved after hardening due to the relatively high carbon content. The steel is suitable for various type of applications where high strength is needed

056K is a low alloyed steel for quench and tempering. Used for machine parts etc. Can be induction or flame hardened

8665 is a continuous casted variant meeting all three of the EN ISO standards.

For additional Heat Treatment Data, please visit the Heat Treatment Guide.

Similar designations

C54, C55E - 1.1203, C55R - 1.1209, 070M55 (BS970), ASTM/SAE 1055, SS 1655, C55R, Cf53, 1.1213

Chemical composition

Variant	Cast	Weldability		C %	Si %	Mn %	P %	S %	Cr %	Ni %	Mo %	V %	DI %
510A	IC	CEV 0.86 _{max}	Min	0.48	0.15	0.60	-	-	-	-	-	-	1.30
		Pcm 0.66 _{max}	Max	0.55	0.35	0.80	0.035	0.025	0.30	0.30	0.10	0.100	2.30

$Cr+Ni+Mo \leq 0.63$

Mechanical Properties

Variant	Condition	Format	Dimension [mm]	Yield strength min [MPa]	Tensile strength [MPa]	Elongation A ₅ [%]	Reduction of area Z _{min} [%]
510A	+QT	Round bar	25 < 40	420	700-850	15	40

*Rp0.2 * Reh, ** Rel*

Transformation temperatures

	Temperature °C
MS	270
AC1	720
AC3	750


Heat treatment recommendations

Treatment	Condition	Temperature cycle	Cooling/quenching
Hot forging	+AR	850-1100°C	In air
Normalizing	+N	790-820°C	In still air
Soft annealing	+SA	680-710°C 2-4h, 15°C/h to 600°C	In still air
Hardening	+QT	790-820°C	In oil, temper immediately
Tempering	+QT	150-650°C 1h see tempering diagram	In still air


Data valid for Ovako 510A.

Heat Treatment Guide generated Graphs


The following graphs are generated from a theoretical model. For further info see the Heat treatment guide module. Select a specific grade version for individual display.

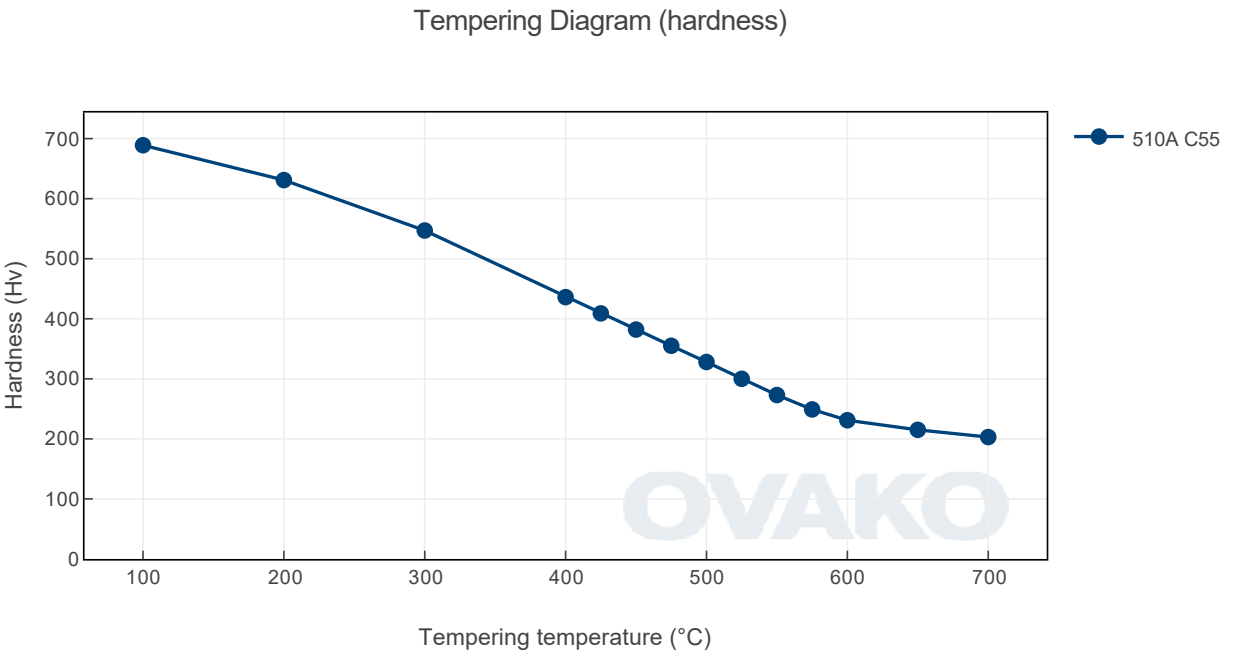

Tempering Diagram (strength)

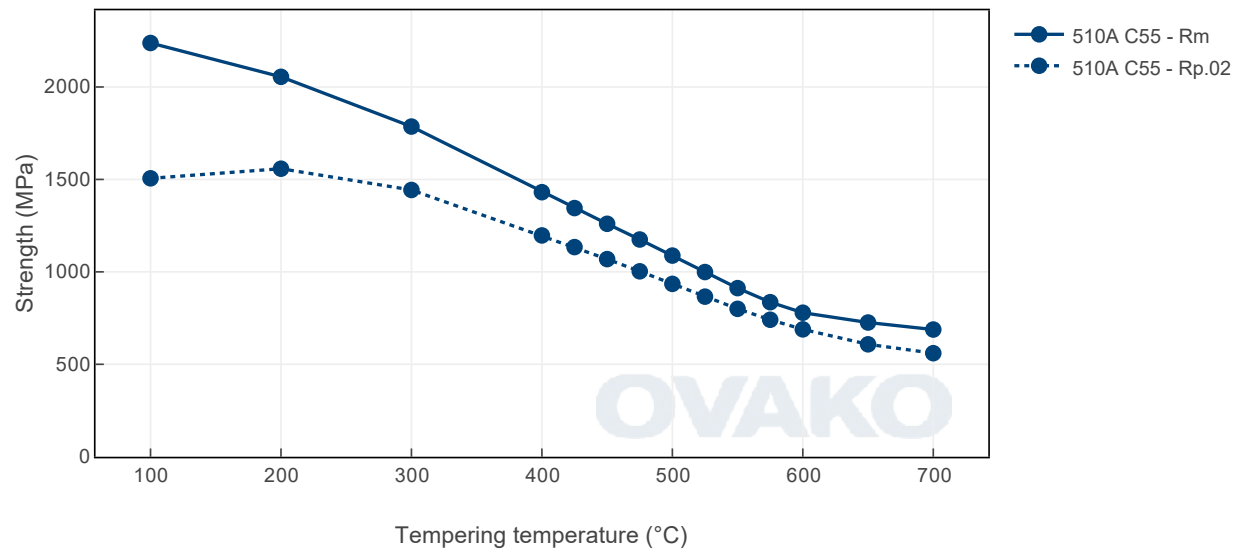


Jominy

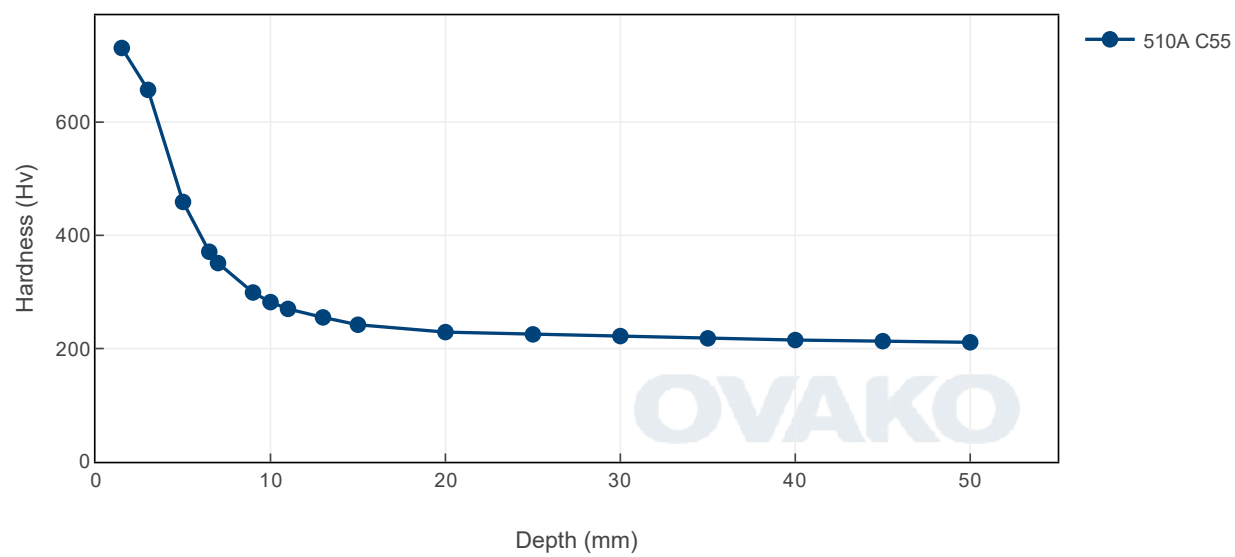

510A

Tempering response

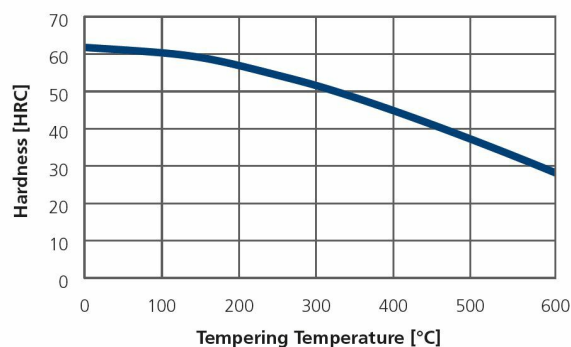

Steel cleanliness

Micro inclusions - 510A								Macro inclusions - 510A	
Applied standard	ASTM E45							Applied standard	ISO 3763 (Blue fracture)
Sampling	ASTM A295							Sampling	Statistical testing on billets
Maximum average	A		B		C		D	Limits	< 5 mm/dm ²
limits	Th	He	Th	He	Th	He	Th		
	2.5	1.5	1.5	0.5	0	0	1.0		

SUSTAINABILITY-ENVIRONMENTAL IMPACT DATA

At Ovako sustainability and reduction of our environmental impact is a major focus in everything we do.

Further information is found [here](#).

Steel works	Hofors	Smedjebacken	Imatra
CO ₂ e/kg	120	62	76

To get the full picture of our products environmental impact we have to look at all of our CO₂ emission sources.

Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

Steel Grade	Format	Condition ⓘ	Scope 1-3 (CO ₂ e kg /1000 kg steel)	Climate compensated Net emission = Scope 3 (CO ₂ e kg /1000 kg steel) Scope 1 - 2 = 0 (compensated)
510A	Round bar	+AR	570	171
510A	Round bar	+QT	575	174
510A	Tube,wall	+AR	589	191
510A	Tube,wall	+QT	597	197
056K	Round bar	+AR	568	169
056K	Round bar	+QT	573	172
056K	Tube,wall	+AR	587	189
056K	Tube,wall	+QT	595	196
SBC55	Flat bar	+AR	405	168

All above data are to be seen as typical values for the specified format and condition. Detailed information about your specific product please contact your sales contact.

Other properties (typical values)

Youngs module (GPa)	Poisson´s ratio (-)	Shear module (GPa)	Density (kg/m3)
210	0.3	80	7800
Average CTE 20-300°C (µm/m°K)	Specific heat capacity 50/100°C (J/kg °K)	Thermal conductivity Ambient temperature (W/m°K)	Electrical resistivity Ambient temperature (µΩm)
12	460 - 480	40 - 45	0.20 - 0.25

Contact us

Would you like to know more about our offers? Don´t hesitate to contact us:

Via e-mail: info@ovako.com

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

Disclaimer

The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.