

# STEEL GRADE

Last revised: Fri, 31 Jan 2025 15:20:25 GMT

## E355 All

### General Information

E355 is a basic quality steel for various construction and engineering purposes, used in eg. mining applications as drill tubes.

### Similar designations

S355, 1.0580


### Chemical composition

Variant	Cast		C %	Si %	Mn %	P %	S %	Cr %	Al %
216S	CC	Min	0.14	0.15	1.10	-	0.010	0.16	0.020
		Max	0.17	0.50	1.30	0.025	0.025	0.26	0.050
EN 10305-1	Std	Min	-	-	-	-	-	-	0.020
		Max	0.22	0.55	1.60	0.025	0.025	-	-


## Heat Treatment Guide generated Graphs

The following graphs are generated from a theoretical model. For further info see the Heat treatment guide module. Select a specific grade version for individual display.


Tempering Diagram (hardness)

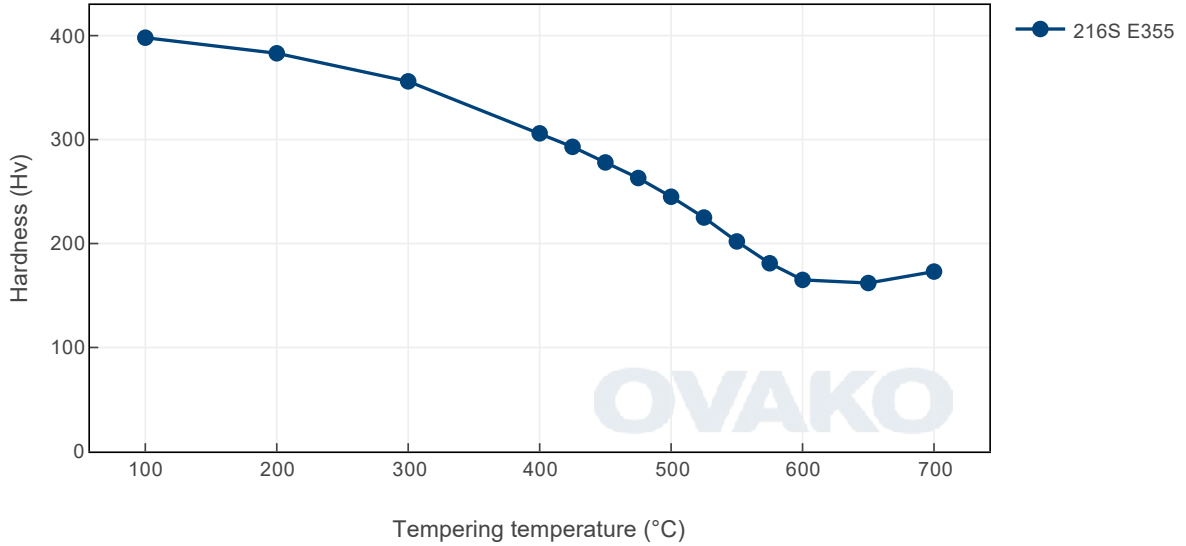

Tempering Diagram (strength)

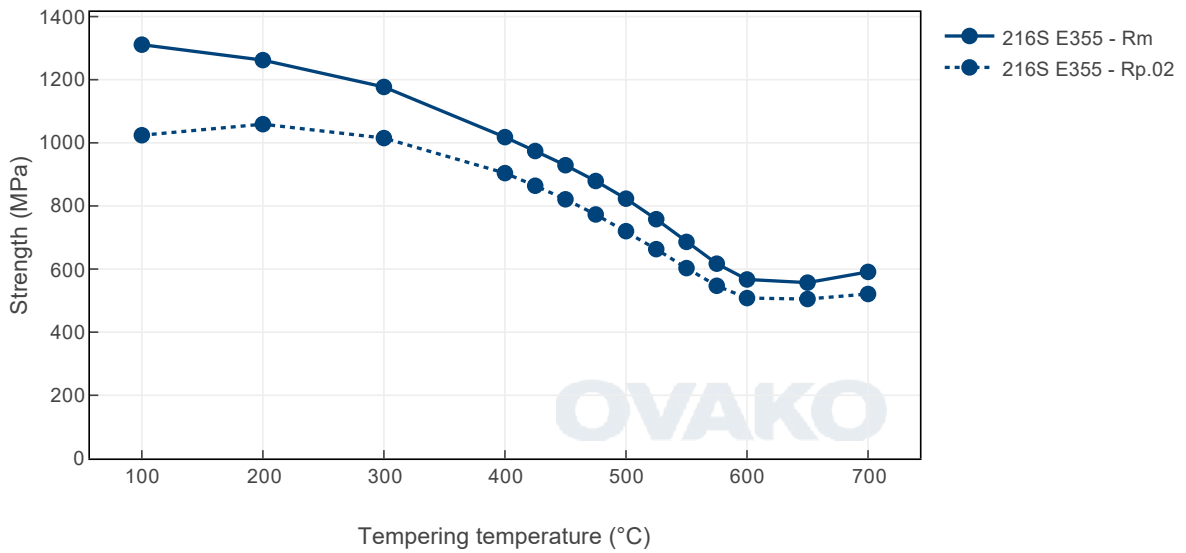

# Jominy

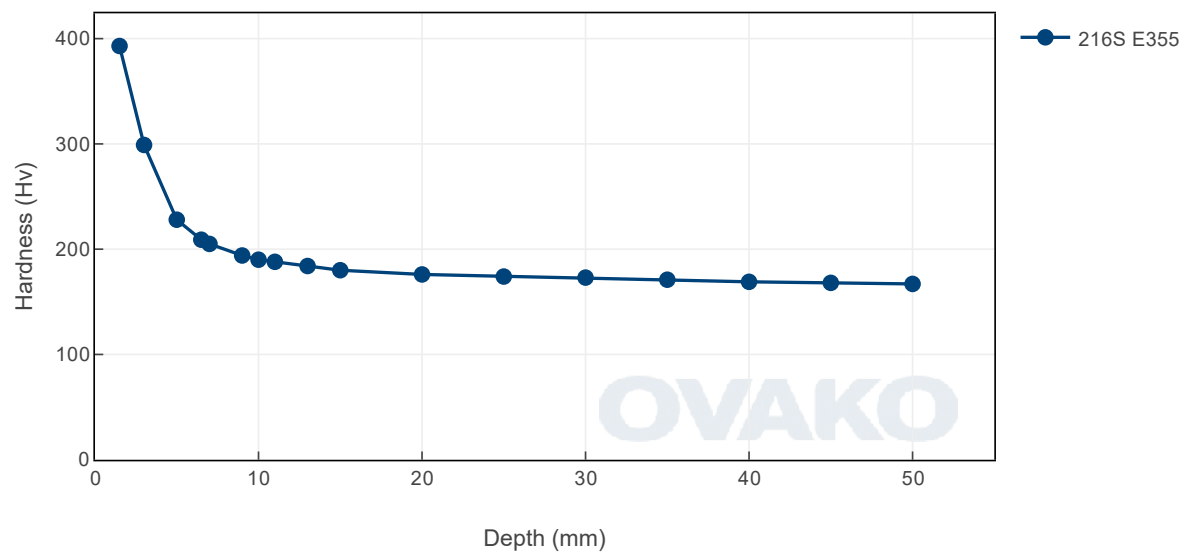



## Other properties (typical values)

Youngs module (GPa)	Poisson´s ratio (-)	Shear module (GPa)	Density (kg/m <sup>3</sup> )
210	0.3	80	7800
Average CTE 20-300°C (µm/m°C)	Specific heat capacity 50/100°C (J/kg °K)	Thermal conductivity Ambient temperature (W/m°C)	Electrical resistivity Ambient temperature (µΩm)
12	460 - 480	40 - 45	0.20 - 0.25

### Contact us

Would you like to know more about our offers? Don´t hesitate to contact us:

Via e-mail: [info@ovako.com](mailto:info@ovako.com)

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

### Disclaimer

*The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.*