

STEEL GRADE

Last revised: Fri, 17 Jan 2025 10:32:07 GMT

21CrMoV5-7 All

General Information

21CrMoV5-7 is a steel for fasteners with specified elevated and/or low temperature properties. 6132, also known as Imanite, has been designed for nitriding, giving similar hardness distribution as case hardening. When using nitriding the distortion due to quenching after carburising can be avoided. 6132 is a M-steel version of 21CrMoV5-7 . M-treatment is very beneficial when the machining is done in Q&T condition and the hardness is about 300 HBW.

M-Steel®

The basis for the concept is that non-metallic inclusions are modified and controlled with calcium treatment in a way to minimize tool wear and to maximize chip control in machining operations. Our M-Steel treatment can be applied to any steel grade.

Similar designations

EN 10269

Chemical composition

| Variant | Cast | | C % | Si % | Mn % | P % | S % | Cr % | Mo % | V % | Ca % |
|---------|------|-----|------|------|------|-------|-------|------|------|-------|--------|
| 6130 | CC | Min | 0.17 | 0.15 | 0.40 | - | - | 1.20 | 0.55 | 0.250 | - |
| | | Max | 0.25 | 0.40 | 0.80 | 0.030 | 0.030 | 1.50 | 0.80 | 0.350 | - |
| 6132 | CC | Min | 0.17 | 0.15 | 0.35 | - | 0.025 | 1.20 | 0.65 | 0.250 | 0.0020 |
| | | Max | 0.25 | 0.35 | 0.85 | 0.030 | 0.040 | 1.50 | 0.80 | 0.350 | - |

Mechanical Properties

| Variant | Condition | Format | Dimension [mm] | Yield strength min [MPa] | Tensile strength [MPa] | Elongation A ₅ [%] | Reduction of area Z _{min} [%] | Hardness | Impact (ISO-V) strength _{min} |
|---------|-----------|-----------|----------------|--------------------------|------------------------|-------------------------------|--|------------|--|
| 6130 | +QT | | 25 < 160 | 550 | 700-850 | 16 | 60 | 205-250 HB | 20 °C 63 J (long) |
| 6132 | +QT | Round bar | 25 < 160 | 800 | 900-1100 | 14 | 60 | 280-345 HB | 20 °C 35 J (long) |

*R_{p0.2} * R_{eh}, ** R_{el}*


Transformation temperatures

| | Temperature °C |
|-----|----------------|
| MS | 405 |
| AC1 | 745 |
| AC3 | 853 |


Heat Treatment Guide generated Graphs

The following graphs are generated from a theoretical model. For further info see the Heat treatment guide module. Select a specific grade version for individual display.


Tempering Diagram (hardness)

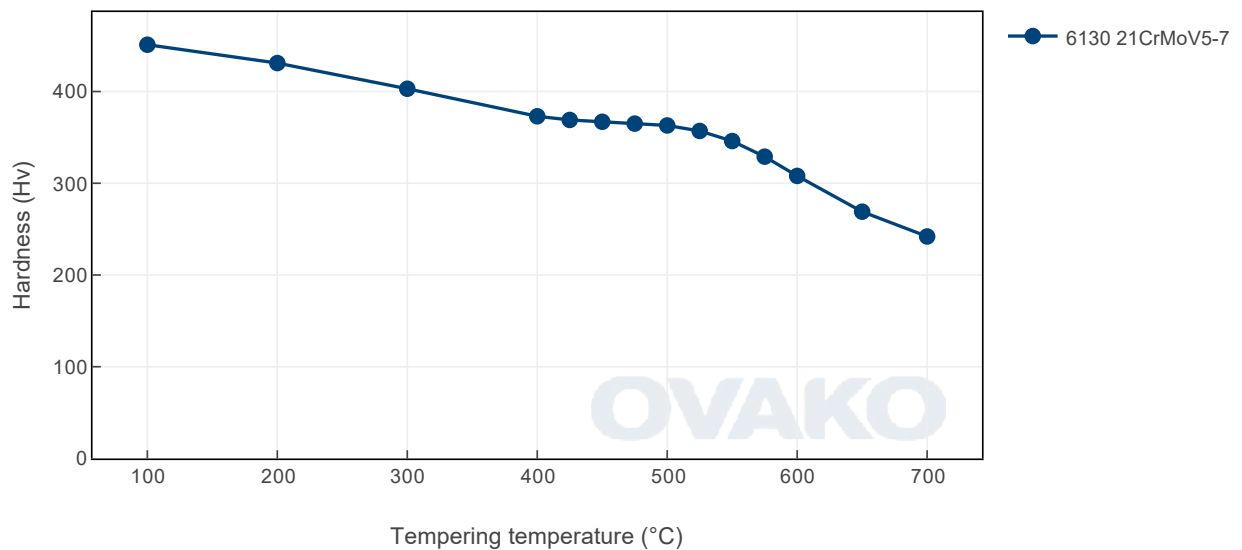

Tempering Diagram (strength)

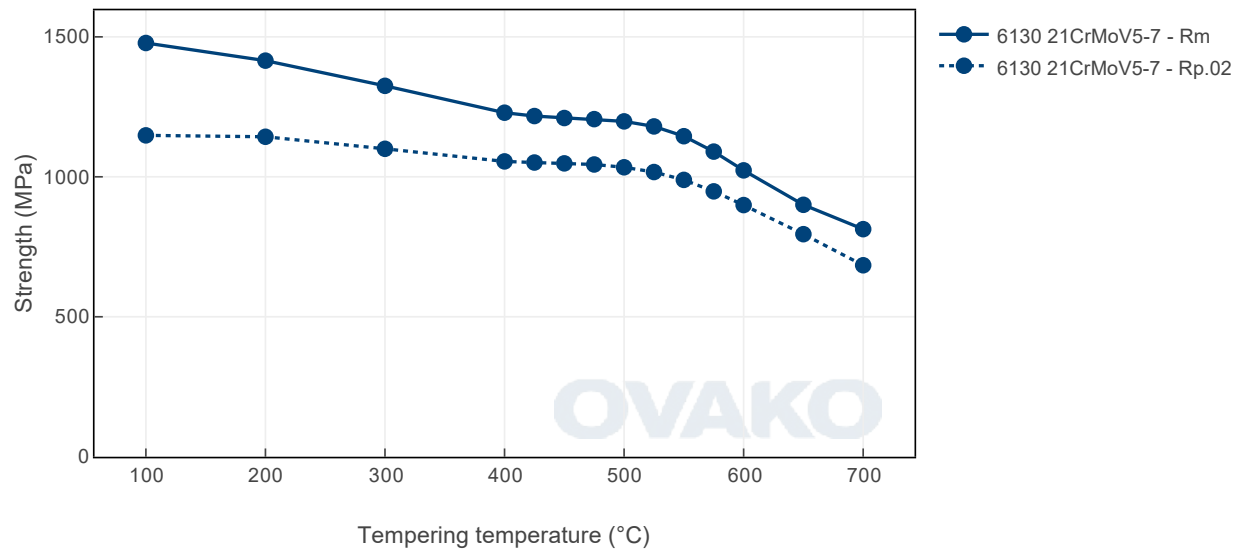

Jominy

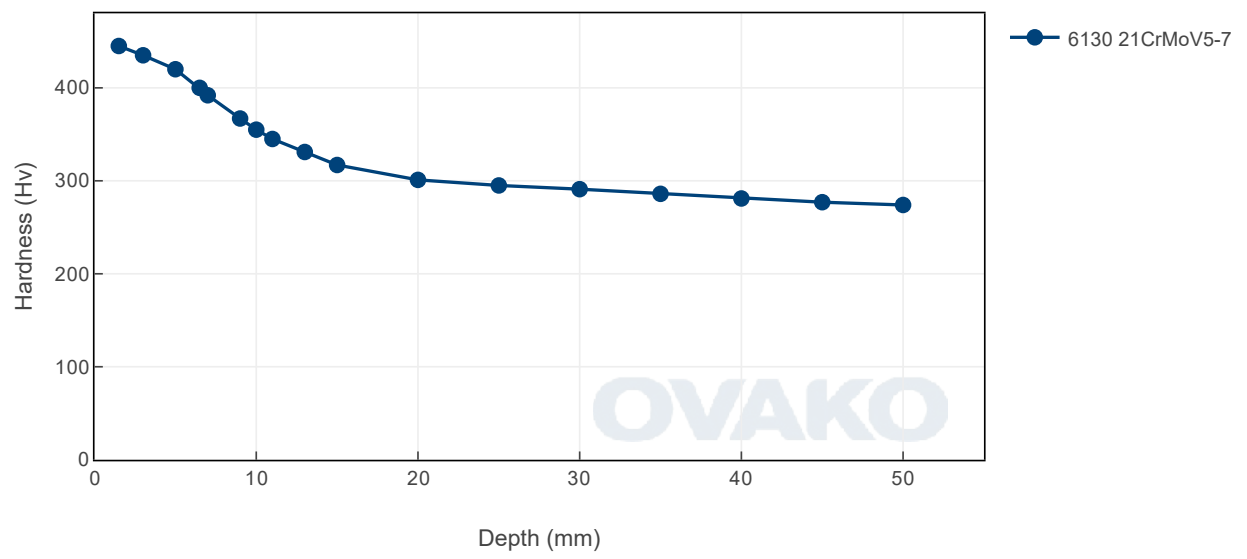

SUSTAINABILITY-ENVIRONMENTAL IMPACT DATA

At Ovako sustainability and reduction of our environmental impact is a major focus in everything we do.

Further information is found [here](#).

| Steel works | Hofors | Smedjebacken | Imatra |
|-------------|--------|--------------|--------|
| CO2e/kg | 120 | 62 | 76 |

To get the full picture of our products environmental impact we have to look at all of our CO₂ emission sources.

Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

| Steel Grade | Format | Condition | Scope 1-3 (CO2e kg /1000 kg steel) |
|----------------|-----------|-----------|------------------------------------|
| Imanite (6132) | Round bar | +AR | 579 |
| Imanite (6132) | Round bar | +QT | 844 |
| 6130 | Round bar | +AR | 568 |
| 6130 | Round bar | +QT | 831 |

All above data are to be seen as typical values for the specified format and condition. Detailed information about your specific product please contact your sales contact.

Other properties (typical values)

| Youngs module (GPa) | Poisson 's ratio (-) | Shear module (GPa) | Density (kg/m3) |
|-------------------------------|---|--|--|
| 210 | 0.3 | 80 | 7800 |
| Average CTE 20-300°C (µm/m°K) | Specific heat capacity 50/100°C (J/kg °K) | Thermal conductivity Ambient temperature (W/m°K) | Electrical resistivity Ambient temperature (µΩm) |
| 12 | 460 - 480 | 40 - 45 | 0.20 - 0.25 |

Contact us

Would you like to know more about our offers? Don't hesitate to contact us:

Via e-mail: info@ovako.com

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

Disclaimer

The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.