

25CrMo4 All

General Information

25CrMo4 is a Cr and Mo alloyed quench and tempering steel with low carbon content. The steel combine high strength with high toughness.

- 322A - is an ingot cast variant .
- 6016 and 6016 are both M-steel

Delivered as rolled, soft annealed, normalized or quench and tempered. Weldable under certain conditions.

Similar designations

SS2225, 4130, 1.7218

Chemical composition

Variant	Cast	Weldability		C %	Si %	Mn %	P %	S %	Cr %	Ni %	Mo %
322A	IC	CEV 0.78 _{max}	Min	0.22	0.10	0.60	-	0.020	0.90	-	0.15
		Pcm 0.45 _{max}	Max	0.28	0.40	0.90	0.025	0.035	1.15	0.25	0.30

Mechanical Properties

Variant	Condition ⓘ	Format	Dimension [mm]	Yield strength min [MPa]	Tensile strength [MPa]	Elongation A ₅ [%]	Reduction of area Z _{min} [%]	Hardness
322A	+A	Tube, wall	-	420	590 typical	25	67	185 HB typical
		Round bar	-	420	590 typical	25	67	185 HB typical
	+QT	Tube, wall	< 15	680	800 typical	15	65	250 HB typical
		Tube, wall	> 15	600	730 typical	15	60	230 HB typical
		Round bar	< 40	680	800 typical	15	65	250 HB typical
		Round bar	40 < 100	600	730 typical	15	60	230 HB typical
		Round bar	> 100	490	620 typical	15	50	200 HB typical

R_{p0.2} * *R_{eh}*, ** *R_{el}*

Transformation temperatures

	Temperature °C
MS	391
AC1	746
AC3	826


Heat treatment recommendations

Treatment	Condition ⓘ	Temperature cycle	Cooling/quenching
Hot forging	+AR	850-1100°C	In still air
Normalizing	+N	840-880°C	In still air
Soft annealing	+A	700-730°C / 3h	In still air
Stress relieve annealing	+SRA	525-620°C	In still air
Hardening	+QT	840-870°C	In oil Temper immediately
Hardening	+QT	820-850°C	In water Temper immediately
Induction or Flame hardening	I-F	850-900°C	Water spray Temper immediately
Tempering	+T	550-675°C	


Heat Treatment Guide generated Graphs

The following graphs are generated from a theoretical model. For further info see the Heat treatment guide module. Select a specific grade version for individual display.


Tempering Diagram (hardness)

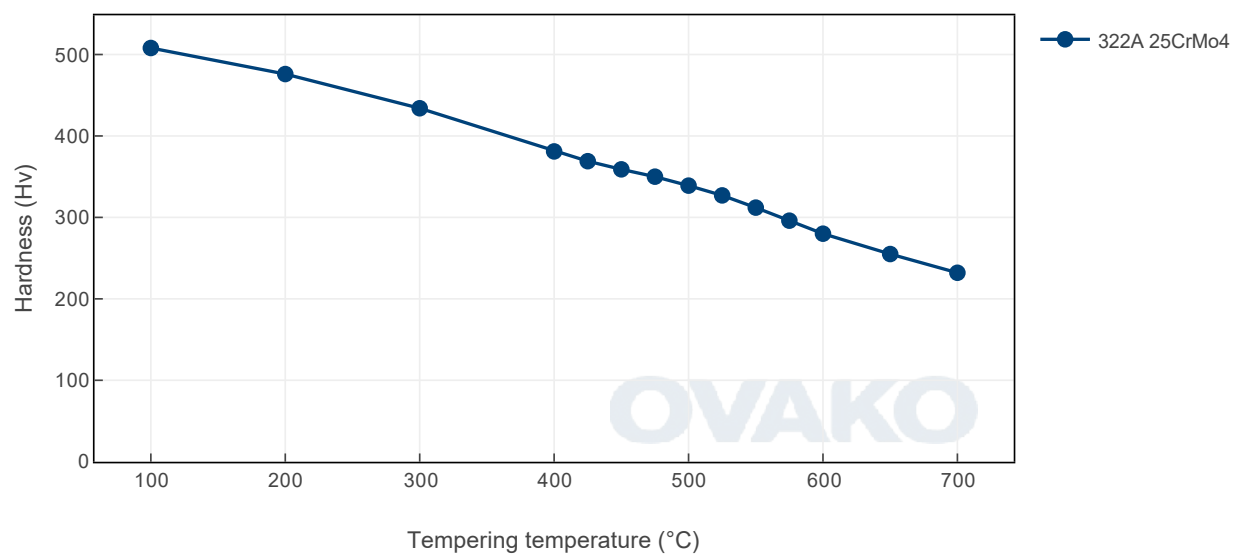


Tempering Diagram (strength)

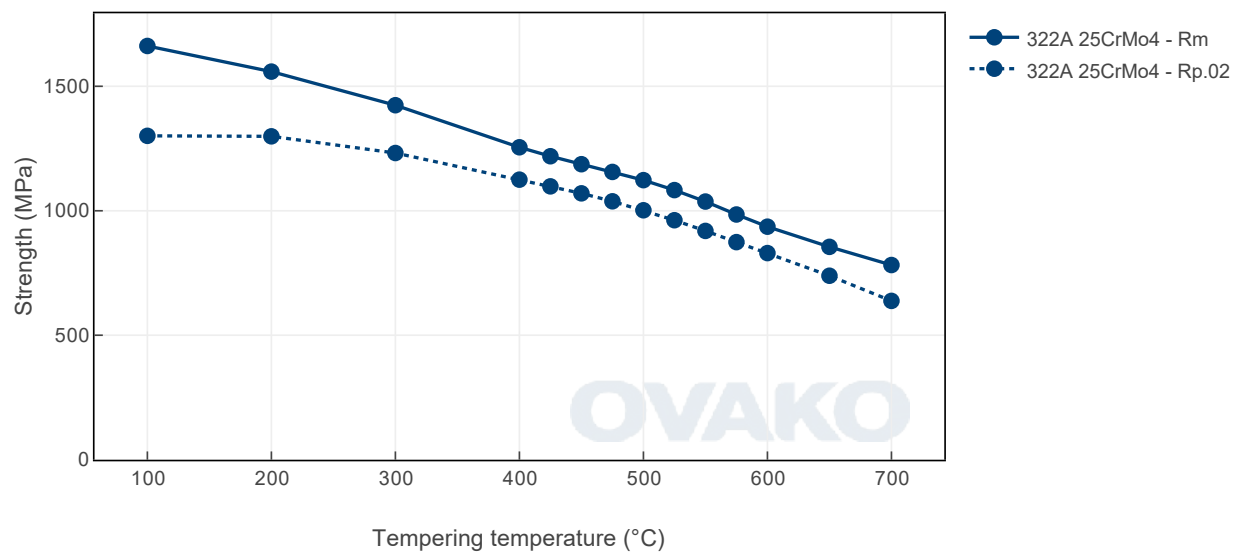

Jominy

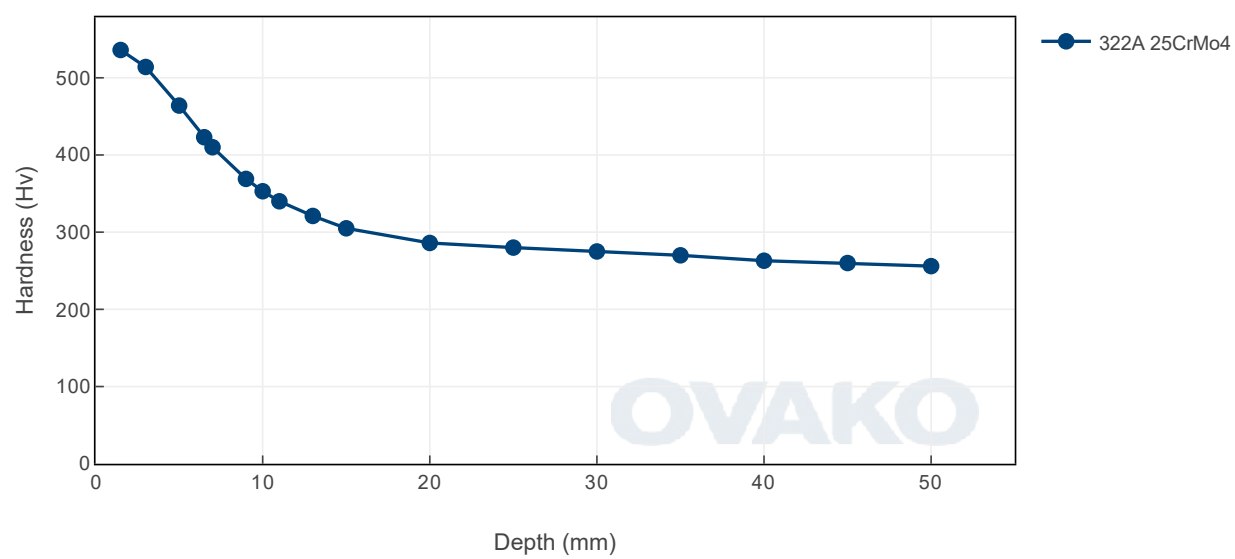

Hardenability

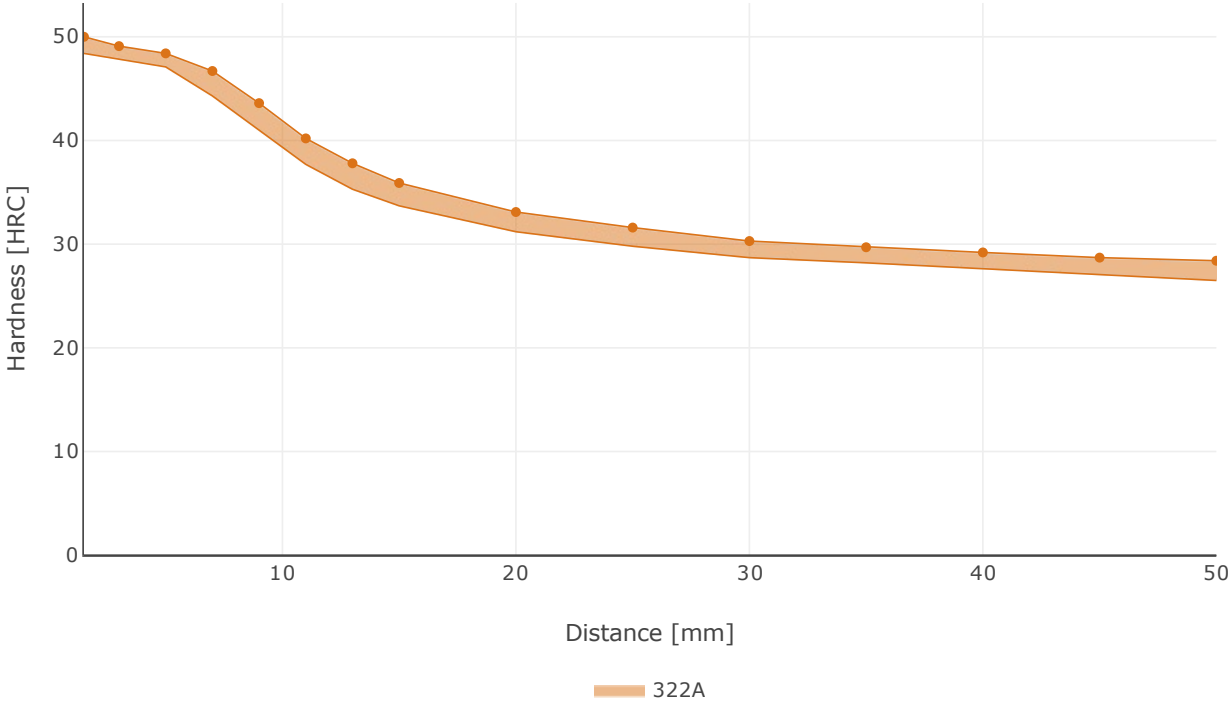

The standard variant is the +HH version of 25CrMo4 EN ISO 683-2

Steel cleanliness

Micro inclusions - steel grade 322A								Macro inclusions - 322A	
Applied standard	ASTM E45							Applied standard	ISO 3763 (Blue fracture)
Sampling	ASTM A295							Sampling	Statistical testing on billets
Maximum average limits	A		B		C		D	Limits	< 5 mm/dm²
	Th	He	Th	He	Th	He	Th		
	2.5	1.5	1.5	0.5	0	0	1.0		

SUSTAINABILITY-ENVIRONMENTAL IMPACT DATA

At Ovako sustainability and reduction of our environmental impact is a major focus in everything we do.
Further information is found [here](#).

Steel works	Hofors	Smedjebacken	Imatra
CO2e/kg	120	62	76

To get the full picture of our products environmental impact we have to look at all of our CO₂ emission sources.
Not only the steel work Scope 1-2 itself, but all operations downstream in our production, heating and heat treatment furnaces etc (full scope 1-2) as well as all the emission from input material, eg. alloys, scope 3.

Steel Grade	Format	Condition	Scope 1-3 (CO ₂ e kg /1000 kg steel)	Climate compensated Net emission = Scope 3 (CO ₂ e kg /1000 kg steel) Scope 1 - 2 = 0 (compensated)
322A	Round bar	+AR	619	220
322A	Round bar	+QT	625	224
322A	Tube, wall	+AR	643	245
322A	Tube, wall	+QT	651	252
9224	Round bar	+AR	464	230
6014, MoC 210 M	Round bar	+AR	525	244
6014, MoC 210 M	Round bar	+QT	779	292

As of 1 January 2022 we use carbon offset for all our scope 1- 2 emissions, so in practice the climate compensated data is the same as the full Scope 3 level.

All above data are to be seen as typical values for the specified format and condition. Detailed information about your specific product please contact your sales contact.

Other properties (typical values)

Youngs module (GPa)	Poisson 's ratio (-)	Shear module (GPa)	Density (kg/m ³)
210	0.3	80	7800
Average CTE 20-300°C (µm/m°K)	Specific heat capacity 50/100°C (J/kg °K)	Thermal conductivity Ambient temperature (W/m°K)	Electrical resistivity Ambient temperature (µΩm)
12	460 - 480	40 - 45	0.20 - 0.25

Contact us

Would you like to know more about our offers? Don't hesitate to contact us:

Via e-mail: info@ovako.com

Via telephone: +46 8 622 1300

For more detailed information please visit <http://www.ovako.com/en/Contact-Ovako/>

Disclaimer

The information in this document is for illustrative purposes only. The data and examples are only general recommendations and not a warranty or a guarantee. The suitability of a product for a specific application can be confirmed only by Ovako once given the actual conditions. The purchaser of an Ovako product has the responsibility to ascertain and control the applicability of the products before using them. Continuous development may necessitate changes in technical data without notice. This document is only valid for Ovako material. Other material, covering the same international specifications, does not necessarily comply with the properties presented in this document.